


Specification

Product name: IP20 2835 LED flexible Strip
Model NO.: YS-RN2835NW120 (19.2W)

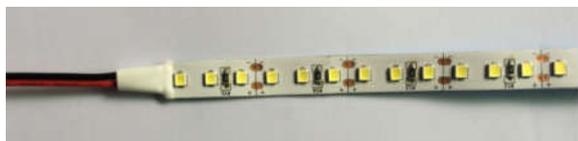

Features

- ◆ Super bright 1600 -1800 Lm/m, 19.2W/m, CRI>85.
- ◆ Uniform color, even light, nice looking.
- ◆ High efficiency, low light decay, long lifespan.
- ◆ Low input voltage DC 12V or 24V, safe to human body.
- ◆ With thermal conductive tape, good for heat dissipation and DIY installation.
- ◆ CE & RoHS compliant.
- ◆ 12V - 25mm cut distance; 24V - 50mm cut distance
- ◆ Warranty: 5 years (stuck with thermal conductive tape on matel)

Application:

Indoor illumination and decoration in home, hotel, shopping mall, cinema, museum, bar, showing room, jewelry counter, etc.




Parameters

Part No.	Emitting Color	CCT	Luminous flux	Input voltage	Power	LED type	LED quantity	IP rate
YS-RN2835NW120	Natural White	4000-4500° K	1600 -1800 Lm	DC12V or 24V	19.2W/m	2835 SMD	120 pcs/m	IP20


Other parameters

Packaging	CRI	Working temperature (°C)	Storage temperature (°C)
5m/reel	>85	-20~ +50	-25~ +60


Dimension (mm)

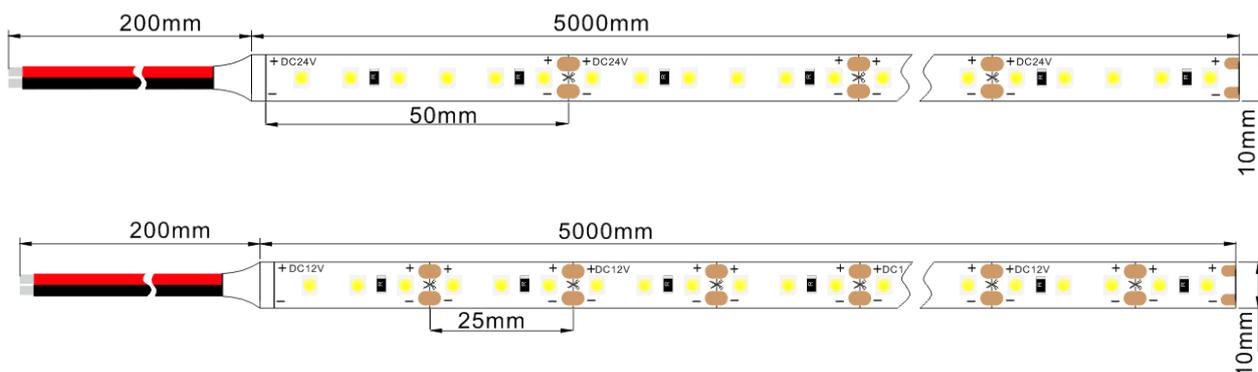


Attached with thermal conductive tape instead of 3M adhesive tape.

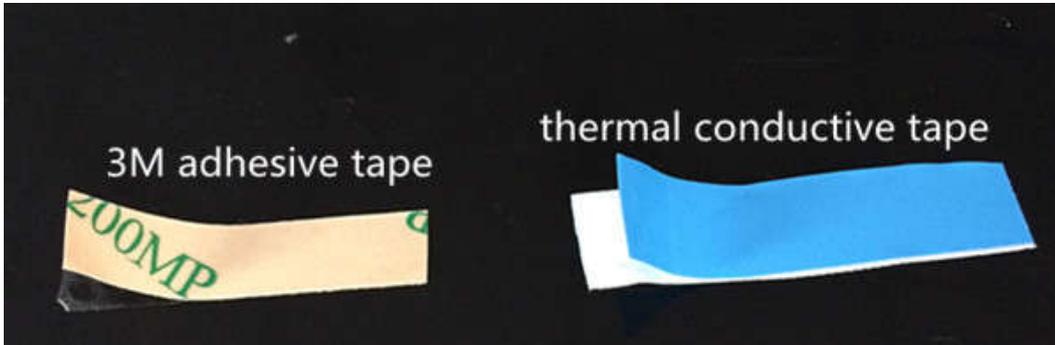


Connection: A, B, C three ways

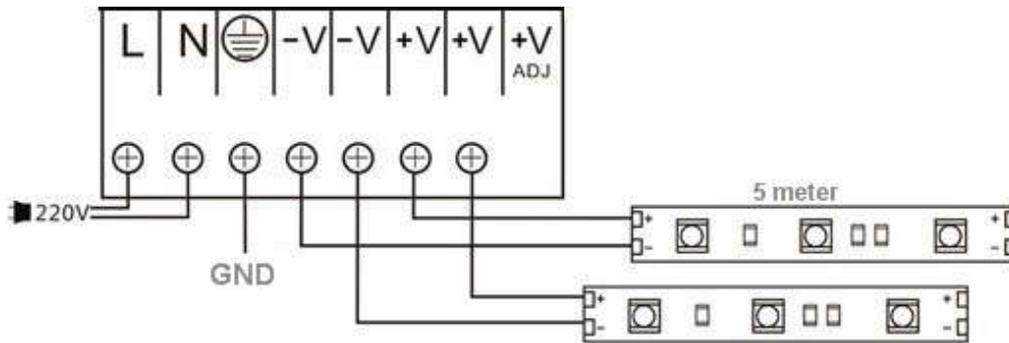

A

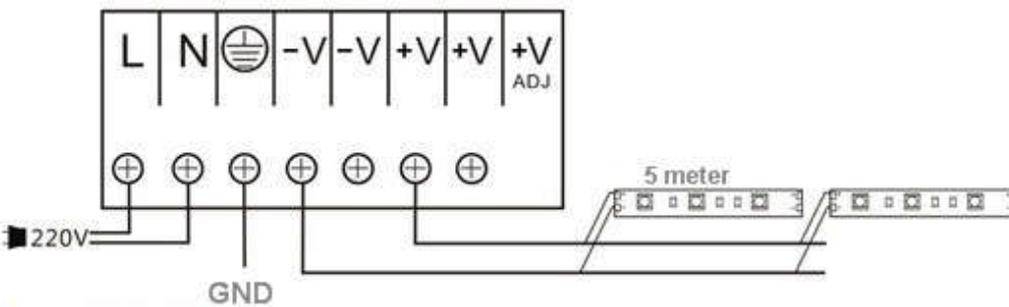

B

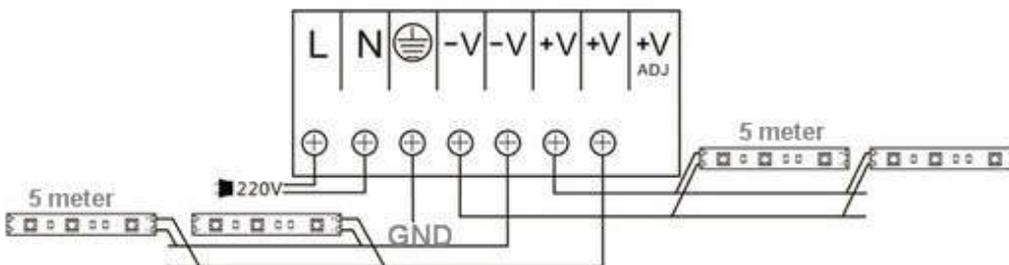

C

Packaging:



5m/reel, 250m/carton, carton size: 505*280*200mm, volume metric weight 7 KG, gross weight 6KG

Common problem and Solutions

- Please check if power supply is connected, or if the switch is in the connected position when the light does not work.
- If the lamp lights on and off frequently, please check connection between power supply and strip in case that it is loose.

Note: If the lights still does not work well after trying the methods above, please contact professional staff for help

.Attentions

- Please do not connect power supply when the light is still in bag.
 - Pay attention to fire, electricity and shake
 - Please do not connect high voltage before the installation, and make sure that the fixture connects the earth
 - Please do not use rough or cleanser to clean this product, do not use high press water to wash this product that it would be harmful for the waterproof components.
 - Please do not use sharp equipment to stab this product, or it may break the internal components.
 - Please do not pull or press too much on the products.
 - Once the light reaches the lifespan, please contact your local relative authority or retailer to ask for recycle suggestion.
 - Recommended working environment temperature is -20~40°C.
 - Please do not use the light if the fixture or wire has problem, check and repair firstly.
 - The light should be installed by professionals.
- * If there is any change for the product, we will not inform again.
- * If you have any question about the specification, please ask qualified engineers for help.

Notice

If the light becomes broken because of misuse of other accessories which are not from our company, we are not responsible this issue.